



IL Range



### Street Lantern LED



Model	SL 8805-02
Wattage	60W
Lamp type	LED
Lamp holder	-
Voltage	AC 100 - 277V
IP Rating	65

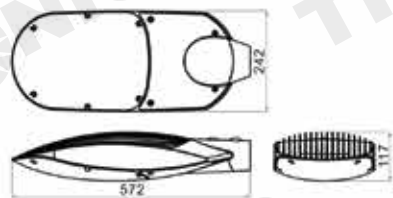

**TRONIC**


IL Range



### Street Lantern LED



Model	SL 8805-01
Wattage	40W
Lamp type	LED
Lamp holder	-
Voltage	AC 100 - 277V
IP Rating	65

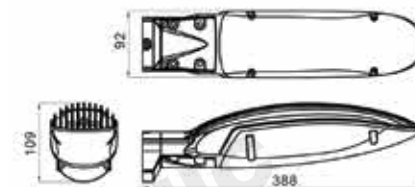


**TRONIC**

## IL Range



Photometric:



## Street Lantern

Model	SL 6002-01	SL 6002-02	SL 6002-03	SL 6002-04	SL 6002-05
Wattage	70W	70W	150W	150W	125W
Lamp type	Metal Halide	Sodium	Metal Halide	Sodium	Sodium
Lamp holder		E27		E40	E27
Voltage	220~240V/50Hz				
IP Rating	65				

### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Spigot mounting: Side Entry.

### Application:

Urban roads and highways.  
Parking areas.  
Residential or industrial areas.  
Parks and commercial areas.



cd/klm

— CO-C180 — C90-C270


Note: Photometric result test based on 14500lm SON150W clear tube

**TRONIC**

## IL Range



Photometric:



## Street Lantern

Model	SL 6006-01	SL 6006-02	SL 6006-03	SL 6006-04	SL 6006-05
Wattage	150W	2500W	250W	250W	400W
Lamp type	Sodium	Metal Halide	Sodium	Sodium	Metal Halide
Lamp holder			E40		
Voltage	220~240V/50Hz				
IP Rating	65				

### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Spigot mounting: Side Entry.

### Application:

Urban roads and highways.  
Parking areas.  
Residential or industrial areas.  
Parks and commercial areas.



cd/klm

— CO-C180 — C90-C270

Note: Photometric result test based on 27500lm SON250W clear tube


**TRONIC**

IL Range

IL Range



Photometric:



## Street Lantern

Model	SL 6015-01
Wattage	150W
Lamp type	Double Ended Metal Halide
Lamp holder	RX7s
Voltage	220~240V/50Hz
IP Rating	65

### Features:


High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Spigot mounting: Side Entry.

### Application:

Urban roads and highways.  
Parking areas.  
Residential or industrial areas.  
Parks and commercial areas.



ISO9001:2008

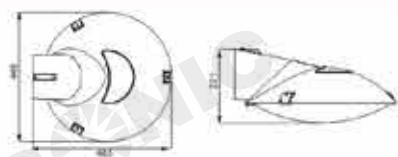

cd/klm

— CO-C180 — C90-C270


Note: Photometric result test based on 5500lm MH70W double ended tube

**TRONIC**



## PVC Street Lantern

Model	SL 8804-01
Wattage	40W(max)
Lamp type	Energy Saver
Lamp holder	E27
Voltage	220V/50Hz
IP Rating	55




**TRONIC**

IL Range



Photometric:



## Flood Light



Model	SL 2004-01	SL 2004-02	SL 2004-03	SL 2004-04
Wattage	250W	400W	250W	400W
Lamp type	Tubular Metal Halide		Tubular Sodium	
Lamp holder	E40			
Voltage	220~240V 50/60Hz			
IP Rating	65			

### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Spigot mounting bracket coated with epoxy powder.

### Application:

Harbours.  
Sport stadiums  
Parking areas.  
Advertisement billboards.  
Factories.  
Beaches.

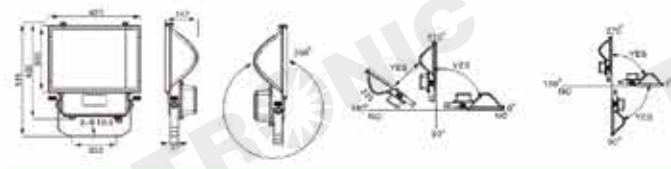

cd/klm

— CO-C180 — C90-C270


Note: Photometric result test based on 32000lm MH400W clear tube

**TRONIC**

IL Range



Photometric:




## Flood Light

Model	SL 2000-01	SL 2000-02	SL 2000-03
Wattage	1000W	1000W	2000W
Lamp type	Tubular Metal Halide	Tubular Sodium	Tubular Metal Halide
Lamp holder	E40		
Voltage	220~240V/50/60Hz		
IP Rating	65		

### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector.  
Remote control gear box: 1000W  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

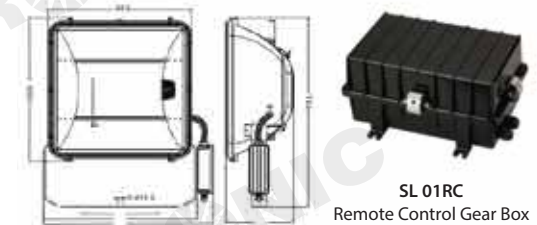

SL 01RC  
Remote Control Gear Box

cd/klm

— CO-C180 — C90-C270

Note: Photometric result test on 189000lm MH2000W clear tube

**TRONIC**




IL Range

IL Range



Photometric:



## Flood Light

Model	SL 2016-01-WH	SL 2016-01-BK	SL 2016-02-WH	SL 2016-02-BK
Wattage	1 x 26W CFL		2 x 26W CFL	
Lamp type	Energy Saver			
Lamp holder	E27			
Voltage	220~240V 50/60Hz			
IP Rating	54			


### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector.  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

### Features:

Court-yards.  
Shop windows.  
Sport area.  
Buildings.  
Urban area.  
Residential area.

CE ISO9001:2008 IP54

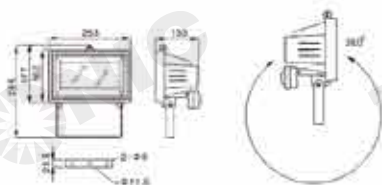

cd/klm

— CO-C180 — C90-C270

Note: Photometric result tested based on 1560lm MH26W clear tube

**TRONIC**



Photometric:



## Flood Light

Model	SL 2028-01	SL 2028-02	SL 2028-03	SL 2028-04
Wattage	65W	70W	70W	70W
Lamp type	Energy Saver	Metal Halide	Sodium	Sodium
Lamp holder	E27			
Voltage	220~240V 50/60Hz			
IP Rating	65			


### Features:

Polycarbonate cover and body.  
High purity anodized hammered aluminium reflector.  
Built in control gear  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

### Features:

Advertisement signage.  
Parking area.  
Facades.  
Sports center.  
Landscape.

CE ISO9001:2008 IP65

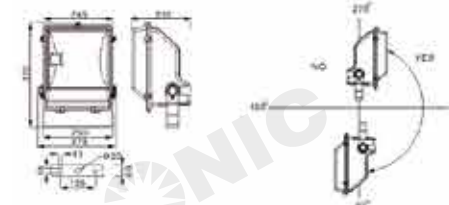

cd/klm

— CO-C180 — C90-C270


Note: Photometric result tested based on 6300lm MH70W clear tube

**TRONIC**

IL Range



Photometric:



## Flood Light

Model	SL 2064-01	SL 2064-02	SL 2064-03	SL 2064-04
Wattage	150W	250W	150W	250W
Lamp type	Tubular Metal Halide		Tubular Sodium	
Lamp holder	E27	E40	E27	E40
Voltage	220~240V 50/60Hz			


### Features:

Steel body coated with epoxy powder.  
High purity anodized hammered aluminium reflector.  
Built in control gear  
Thermal resistant tempered glass.

### Features:

Offices.  
Hyper markets.  
Warehouses.  
Commercial area.

CE ISO9001:2008




**TRONIC**

IL Range



Photometric:



## Flood Light

Model	SL 2065-01	SL 2065-02	SL 2065-03	SL 2065-04
Wattage	250W	400W	250W	400W
Lamp type	Tubular Metal Halide		Tubular Sodium	
Lamp holder	E40			
Voltage	220~240V 50/60Hz			
IP Rating	65			

### Features:

High pressure aluminium Die cast body coated with epoxy power.  
High purity anodized hammered aluminium reflector.  
Built in control gear  
Thermal resistant tempered glass.  
Steel mounting brackets coated with epoxy powder.

### Features:


Hatbour.  
Parking area.  
Sport stadiums.  
Factories.  
Advertisement billboard.

cd/klm

— CO-C180 — C90-C270

Note: Photometric result tested based on 32500lm MH400W clear tube

CE IP66 ISO9001:2008

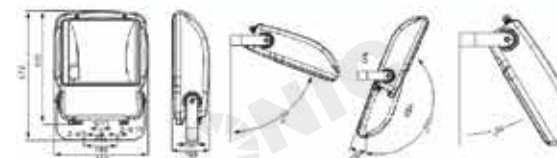


**TRONIC**

IL Range



Photometric:




Flood Light

Model	SL 2005-01	SL 2005-02	SL 2005-03	SL 2005-04
Wattage	250W	400W	250W	400W
Lamp type	Tubular Metal Halide		Tubular Sodium	
Lamp holder	E40			
Voltage	220~240V 50/60Hz			
IP Rating	65			

- Features:**
- High pressure aluminium Die cast body coated with epoxy power.
  - High purity anodized hammered aluminium reflector.
  - Built in control gear
  - Thermal resistant tempered glass.
  - Steel mounting brackets coated with epoxy powder.

- Features:**
- Hatbour.
  - Beaches.
  - Parking area.
  - Sport stadiums.
  - Factories.

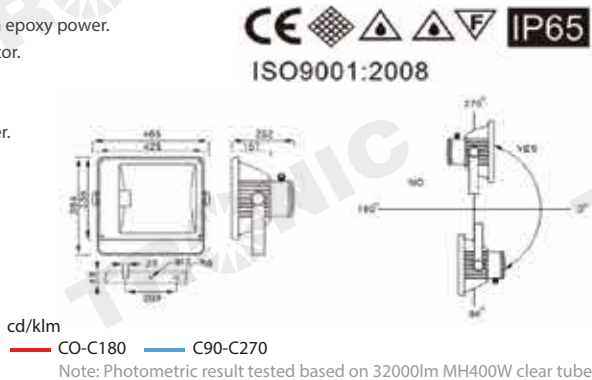


L Range



LED Flood Light

Model	SL 2006-01	SL 2006-02
Wattage	70W	150W
Lamp type	Metal Halide	
Lamp holder	E40	
Voltage	220~240V 50/60Hz	
IP Rating	65	





Flood Light

Model	SL 1003	SL 1005
Wattage	120W (max)	
Lamp type	Energy Saver	
Lamp holder	1 x E27	2 x E27
Voltage	90~270V 50/60Hz	
IP Rating	65	

**Features:**  
Polycarbonate or aluminium Die-cast body with PC cover.  
High purity anodized aluminium reflector.

**Technical information:**  
Operating Voltage: AC90-270 V 50/60Hz.





Spot Light

Model	SL 2034-01	SL 2034-02	SL 2035
Wattage	70W	150W	150W
Lamp type	Metal Halide	Metal Halide	PAR30
Lamp holder	G12	G12	E27
Voltage	220~240V 50/60Hz		
IP Rating	65		

**Features:**  
High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

**Application:**  
Court yards.  
Shop windows.  
Billboards.  
Building.  
Landscape.  
Sports establishments.

Photometric:

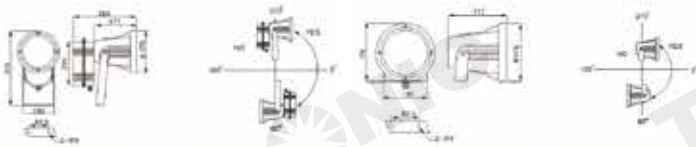


cd/klm  
— CO-C180 — C90-C270  
Note: Photometric result test based on 7300lm MH70W G12 clear tube



IL Range



Photometric:



Spot Light


Model	SL 2036-01	SL 2036-02
Wattage	30~70W	150W
Lamp type	Double Ended Metal Halide	
Lamp holder	RX7s	
Voltage	220~240V / 50/60Hz	
IP Rating	65	

**Features:**

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

**Application:**

Court yards.  
Shop windows.  
Billboards.  
Building.  
Landscape.  
Sports establishments.




cd/klm  
— CO-C180 — C90-C270

Note: Photometric result test based on 11000lm MH150W G12 double ended tube

IL Range



Photometric:



Spot Light


Model	SL 2043-01	SL 2043-02
Wattage	1000W	1000W
Lamp type	Tubular Metal Halide	Tubular Metal Halide
Lamp holder	E40	
Voltage	220~240V 50 / 60Hz	
IP Rating	65	

**Features:**

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

**Application:**

Stadiums.  
Facades.  
Parkings.  
Landscape.  
Sports establishments.  
Flood towers.

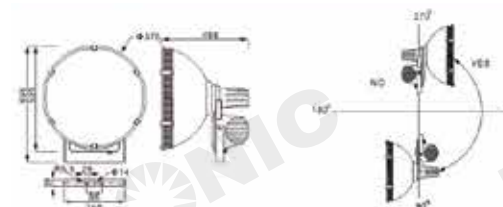

cd/klm  
— CO-C180 — C90-C270


Note: Photometric result test based on 85000lm MH1000W clear tube



IL Range



Photometric:



Spot Light


Model	SL 2044-01	SL 2044-02	SL 2044-03	SL 2044-04
Wattage	70W	150W	70W	150W
Lamp type	Metal Halide		Sodium	
Lamp holder	E27			
Voltage	220~240V 50 / 60Hz			
IP Rating	65			

#### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

#### Application:

Stadiums.  
Facades.  
Parkings.  
Landscape.  
Sports establishments.  
Flood towers.

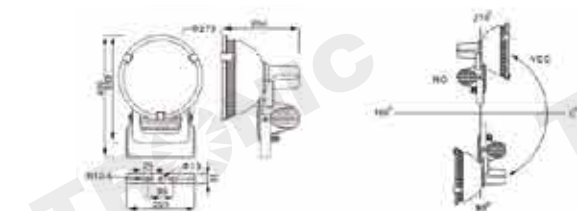

cd/klm

— CO-C180 — C90-C270


Note: Photometric result test based on 6300lm MH70W clear tube

**TRONIC**

IL Range



Photometric:



Spot Light


Model	SL 2045-01	SL 2045-02	SL 2045-03	SL 2045-04
Wattage	250W	400W	250W	400W
Lamp type	Tubular Metal Halide		Tubular Sodium	
Lamp holder	E40			
Voltage	220~240V 50/60Hz			
IP Rating	65			

#### Features:

High pressure aluminium die-cast body coated with epoxy powder.  
High purity anodized hammered aluminium reflector built-in control gear.  
Thermal resistant tempered glass.  
Steel mounting bracket coated with epoxy powder.

#### Application:

Stadiums.  
Facades.  
Parkings.  
Landscape.  
Sports establishments.  
Flood towers.

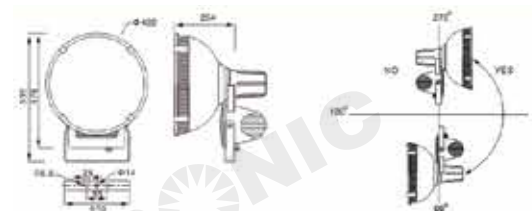

cd/klm

— CO-C180 — C90-C270


Note: Photometric result test based on 6300lm MH70W clear tube

**TRONIC**

IL Range



Photometric:



Wall Pack


Model	SL 2060-01	SL 2060-02
Wattage	70W	70W
Lamp type	Tubular Metal Halide	Tubular Sodium
Lamp holder	E27	
Voltage	220~240V/50/60Hz	
IP Rating	65	

**Features:**

Polycarbonate or aluminium Die-Cast Body with PC cover.  
High purity anodized aluminium reflector.

**Application:**

Parking areas.  
Facades.  
Garden & parks.  
Landscapes.



cd/klm

— CO-C180 — C90-C270


Note: Photometric result test based on 5800lm MH70W Coated bulb

**TRONIC**

IL Range



Photometric:



Wall Pack


Model	SL 2063-01	SL 2063-02
Wattage	70W	70W
Lamp type	Tubular Metal Halide	Tubular Sodium
Lamp holder	E27	
Voltage	220~240V/50/60Hz	
IP Rating	65	

**Features:**

Polycarbonate or aluminium Die-Cast Body with PC cover.  
High purity anodized aluminium reflector.

**Application:**

Parking areas.  
Facades.  
Garden & parks.  
Landscapes.

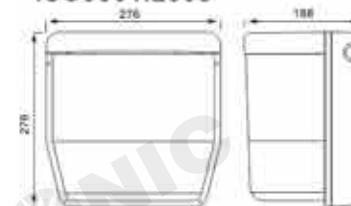

cd/klm

— CO-C180 — C90-C270

Note: Photometric result test based on 5800lm MH70W Coated bulb

**TRONIC**

IL Range




### Prismatic Highbay

Model	SL 7060-01	SL 7060-02
Wattage	85W	
Lamp type	-	
Lamp holder	-	
Voltage	220~240V/50Hz	

IL Range



Photometric:



### Highbay with Control Gear

Model	SL 8802-01	
Wattage	250W	
Lamp type	Metal Halide Lamp	Sodium
Lamp holder	E40	
Voltage	220~240V 50/60Hz	








Underground Light

<b>Model</b>	<b>SL 8803-01</b>
Wattage	50W
Lamp type	-
Lamp holder	GU10
Voltage	AC 220 50Hz
IP Rating	65



Waterproof Light

<b>Model</b>	<b>SL 8801-01</b>
Wattage	20W
Lamp type	-
Lamp holder	JC
Input Voltage	AC 12V
Material	ABS
IP Rating	68




IL Range



Petrol Pump Light

Model	SL 8806-01
Wattage	400W
Lamp type	Metal Halide
Lamp holder	E40
Voltage	220V / 50Hz
IP Rating	68



IL Range



Ballast Mercury

Model	BA 0070	BA 0125	BA 0150	BA 0250	BA 0400
Wattage	70W	125W	150W	250W	400W
Lamp type	Mercury				
Voltage	220V-240V/ 50Hz				



Ballast Metal Halide

Model	BM 0150	BM 0250	BM 0400	BM 1000	BM 2000
Wattage	150W	250W	400W	1000W	2000W
Lamp type	Metal Halide				
Voltage	220V-240V/ 50Hz				



Ballast Sodium

Model	BS 0070	BS 0150	BS 0250	BS 0400
Wattage	70W	150W	250W	400W
Lamp type	Sodium			
Voltage	220V-240V/ 50Hz			



Ignitor

Model	IG 0400	IG 1000	IG 2000
Wattage	400W	1000W	2000W
Type	Ignitor		
Voltage	220V-240V/ 50-60Hz		



Capacitor

Model	UF 0032	UF 0085	UF 0125	UF 0130	UF 0400
Wattage	32µF	85µF	125µF	130µF	400µF
Lamp type	Capacitor				
Voltage	220V				